


DRAFT

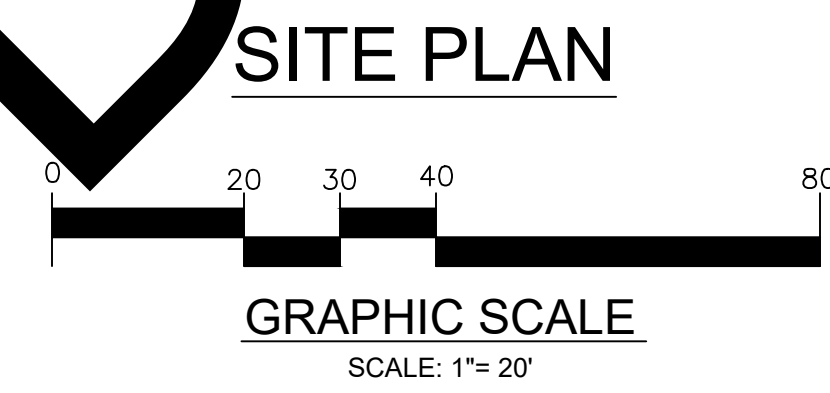

- NOTES:**
1. CONTRACTOR TO FIELD VERIFY ALL PROPOSED ELEVATIONS.
  2. EXISTING 2"( $\pm$ ) WATER SUPPLY PIPES FROM WELL HOUSE TO POND ARE TO BE PROTECTED.
  3. CONTRACTOR TO COMPLETE TEST PITS AS DIRECTED IN ADVANCE OF ORDERING OR INSTALLING ANY CONSTRUCTION MATERIALS.
  4. CONTRACTOR SHALL UTILIZE A SUITABLE PAVEMENT SAW OR MILLING MACHINE TO CUT ALL PAVEMENTS AND CONCRETE IN NEAT LINES.
  5. REFER TO DETAIL SHEET FOR SOIL EROSION AND SEDIMENT CONTROL DETAILS AND NOTES.
  6. UTILITY LOCATIONS SHOWN ARE APPROXIMATE. UTILITY SERVICE CONNECTIONS ARE NOT SHOWN. CONTRACTOR SHALL CALL FOR MARKOUT OF THESE FACILITIES PRIOR TO CONSTRUCTION.
  7. ALL EXISTING CONCRETE SHALL BE DISPOSED OFF-SITE AND NOT USED ON AS ON-SITE BACKFILL.
  8. CONTRACTOR SHALL DEFINE THE LOCATION OF SITES TO BE USED FOR DISPOSAL OF EXCAVATION MATERIALS PRIOR TO PRECONSTRUCTION MEETING AND IN ACCORDANCE WITH SOIL EROSION AND SEDIMENT CONTROL STANDARDS.
  9. CONTRACTOR SHALL COMPLY WITH THE ENVIRONMENTAL PROTECTION AND RESTORATION REQUIREMENTS SHOWN ON CONTRACT DRAWINGS AND INCLUDED IN CONTRACT SPECIFICATIONS.
  10. SEEDING AND GRADING LIMITS SHALL INCLUDE ALL AREAS WHICH ARE PART OF THE NEW CONSTRUCTION AND ALL AREAS DISTURBED BY CONSTRUCTION PROCEDURES, EQUIPMENT OR VEHICLES. ALL DECORATIVE PLANTS DISTURBED SHALL BE REPLACED IN KIND OR AS DIRECTED BY THE ENGINEER.
  11. CONTRACTOR TO FINISH GRADE WITHIN 5 FEET OF ALL IMPROVEMENTS. GRADING AROUND DRAINAGE INLETS SHALL ENSURE THAT AREAS OF CONCENTRATED RUNOFF ARE DIRECTED TO GRATES.
  12. DEWATERING WILL BE REQUIRED. MUD-LADEN WATER SHALL NOT BE DISCHARGED TO DRAINAGE PIPING OR WATERWAYS.

THIS TOPOGRAPHIC SURVEY IS REFERENCED TO NEW JERSEY STATE PLANE COORDINATE SYSTEM NAD'83 AND ELEVATION NAVD'88.

<p><b>CHATHAM TOWNSHIP</b>  <b>MORRIS COUNTY, NEW JERSEY</b>  <b>COLONY POOL RETAINING WALL</b>  <b>BLOCK 106 - LOT 1</b>  <b>SITE PLAN</b></p>		<p><b>M M</b>  <b>MOTT</b>  <b>MACDONALD</b>                  Certificate No. 24GA28016800                  412 Mt. Kemble Avenue                  Suite G22                  Morristown, New Jersey 07960                  Tel. 908.256.6600 Fax. 973.267.2899</p>	<p>JOHN K. RUSCHKE                  PROFESSIONAL ENGINEER                  NEW JERSEY LICENSE NO. 37148</p>
File	COLONIAL POOL IMPR.	Date	6/26/24 FOR APPROVAL
Book	Page	Approved	Date
507109812-006	2	JKR	6/26/24
Scale	B/O	Checked	Date
1"=20'		HB	6/26/24
		Drawn	Date
		NM	6/26/24
		Designed	Date
		AS	6/26/24
		Revision	